

A902MT Vision Master Pro451



19"
monitoren

- High Contrast 19" (18", 46cm viewable)
Flat screen Diamondtron NF
- 0,25/0,27mm aperture grille, dual focus CRT, for a crisp clear, dynamic display
- Simply to operate 6 push button controls
- High resolution On-screen Display for ease of set-up and use
- Plug-and-play DDC1/2B™ compatible
- Auto selection of dual input
15 pin D-sub
- Ecologically manufactured, fully recyclable
- TCO'99 approved




iiyama

a visible difference

A902MT Vision Master Pro451

Model	A902MT Vision Master Pro451	Power management	VESA DPMS, NUTEK, Energy Star® Compliance
CRT	49cm (19"), Flatscreen Diamondtron NF (18", 46cm viewable)	Power consumption	138W maximum in normal use <=10W in suspend mode <= 3W in active-off mode
Dot pitch	0,25/0,27mm AG Pitch Aperture Grille	Screen controls	Contrast, Brightness, Color temp. 4.500 - 10.000K, Zoom, H-size, V-size, H-position, V-position, Pin-cushion, Trapezoid, Parallelogram, Pin-balance, Tilt, H-convergence, V-convergence, H-moiré, OPQ-Text/ Picture/Movie, Degauss, Landing 4 corners, OSD Position, OSD Off-timer 3,5,15,30-45sec, Language (UK, D, F, NL, SWE, JAP), Lockout, Save recall, Help on/off, Information
Sync frequency	Horizontal: 30 - 115kHz, Vertical: 50 - 180Hz	Color temperature	Adjustable between 4.500 - 10.000K
Video bandwidth	300MHz dot clock	Approvals	TCO'99, CE, TÜV-GS/MPR II/ISO 9241-3/ ISO 9241-7/ISO 9241-8, PTB, FCC-B, UL/C-UL, DHHS, DHNW
Resolution	640 x 480 @ 180Hz refresh 800 x 600 @ 180Hz refresh 1024 x 768 @ 142Hz refresh 1152 x 864 @ 126Hz refresh 1280 x 1024@ 107Hz refresh 1600 x 1200@ 92Hz refresh 1800 x 1440@ 77Hz refresh	Manufacture	All monitors manufactured using CFC free materials, non-toxic metals and non-bromided flame retardants, and are fully recyclable. Recycled material used for packaging and user documentation
Input connectors	2 x 15 pin D-sub connector, Audio, USB upstream / 4 x downstream, Headphone connector Ø 3.5mm mini jack	Additional features	Intergrated self-powered USB HUB (1 upstream, 4 downstream ports Rev1.1), 2 x 1W front firing speakers, Headphone connector, All controls and input connectors are lokated in the monitor stand
Plug & Play	VESA DDC 2B™ Compliance	Warranty	3 years on-site service
Number of signal storage	Factory-presets: 6 User memory locations: 10		
Dimensions	450mm x 450mm x 447mm (WxHxD)		
Net weight	24kg		
Controls	High resolution on-screen display 6 button control-system		

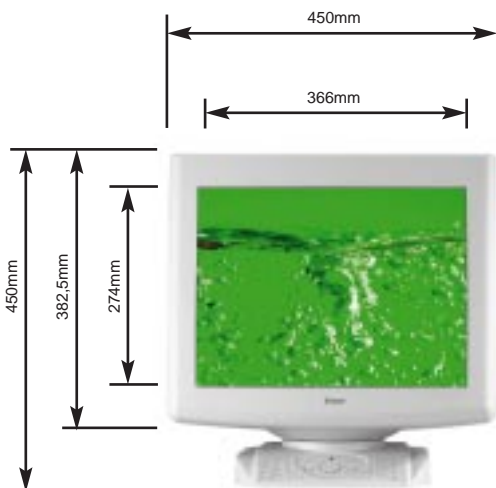

Iiyama

a visible difference